


40  
ton

TEREX  
CTT 721

Wersje montażowe

CORLEONIS

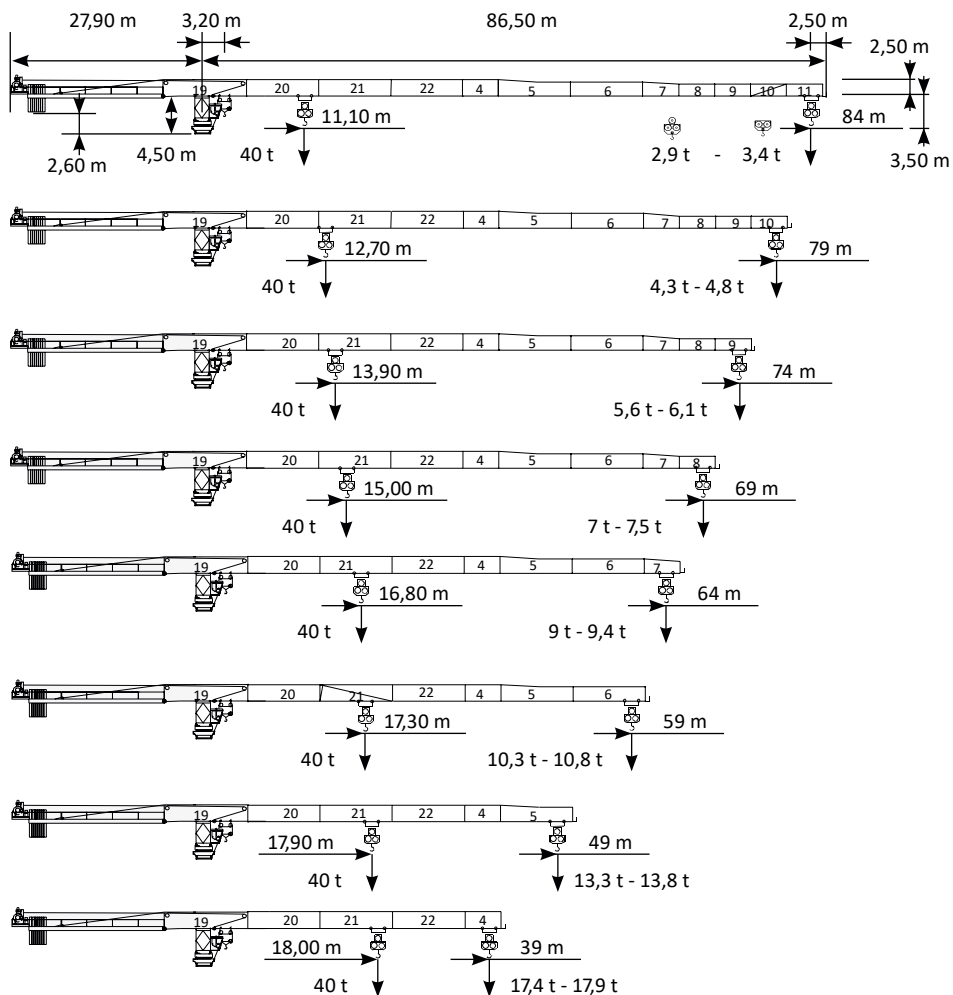

CE FEM




Zeskanuj kod  
i pobierz kartę na telefon


## Tabela udźwignięw

		CTT 721 - 40															
		m	19	24	29	34	39	44	49	54	59	64	69	74	79	84	
20 t	21,50 m	t	20,00	17,70	14,25	11,81	10,00	8,60	7,49	6,58	5,82	5,19	4,64	4,17	3,76	3,4	
20 t	20,90 m	t	20,00	17,08	13,65	11,24	9,44	8,05	6,95	6,05	5,30	4,67	4,13	3,67	3,26	2,9	
40 t	11,10 m	t	22,30	17,08	13,65	11,24	9,44	8,05	6,95	6,05	5,30	4,67	4,13	3,67	3,26	2,9	
20 t	24,70 m	t	20,00	20,00	16,73	13,96	11,90	10,30	9,04	8,00	7,15	6,42	5,80	5,27	4,80		
20 t	24,00 m	t	20,00	20,00	16,14	13,39	11,35	9,76	8,51	7,48	6,63	5,91	5,30	4,76	4,30		
40 t	12,70 m	t	25,99	20,04	16,14	13,39	11,35	9,76	8,51	7,48	6,63	5,91	5,30	4,76	4,30		
20 t	27,10 m	t	20,00	20,00	18,54	15,54	13,30	11,57	10,19	9,07	8,14	7,35	6,68	6,10			
20 t	26,40 m	t	20,00	20,00	17,97	14,98	12,75	11,03	9,67	8,55	7,63	6,85	6,18	5,60			
40 t	13,90 m	t	28,67	22,20	17,97	14,98	12,75	11,03	9,67	8,55	7,63	6,85	6,18	5,60			
20 t	29,30 m	t	20,00	20,00	20,00	16,99	14,59	12,74	11,26	10,06	9,06	8,22	7,50				
20 t	28,50 m	t	20,00	20,00	19,65	16,44	14,05	12,21	10,74	9,55	8,55	7,72	7,00				
40 t	15,00 m	t	31,13	24,19	19,65	16,44	14,05	12,21	10,74	9,55	8,55	7,72	7,00				
20 t	32,60 m	t	20,00	20,00	20,00	19,12	16,46	14,41	12,77	11,44	10,33	9,40					
20 t	32,10 m	t	20,00	20,00	20,00	18,77	16,10	14,03	12,39	11,05	9,94	9,00					
40 t	16,80 m	t	35,22	27,45	22,36	18,77	16,10	14,03	12,39	11,05	9,94	9,00					
20 t	33,90 m	t	20,00	20,00	20,00	19,33	17,17	15,03	13,33	11,95	10,80						
20 t	33,10 m	t	20,00	20,00	20,00	19,40	16,64	14,52	12,82	11,45	10,30						
40 t	17,30 m	t	36,34	28,34	23,10	19,40	16,64	14,52	12,82	11,45	10,30						
20 t	34,90 m	t	20,00	20,00	20,00	20,00	17,75	15,55	13,80								
20 t	34,10 m	t	20,00	20,00	20,00	20,00	17,24	15,05	13,30								
40 t	17,90 m	t	37,57	29,31	23,90	20,08	17,24	15,05	13,30								
20 t	35,20 m	t	20,00	20,00	20,00	20,00	17,90										
20 t	34,40 m	t	20,00	20,00	20,00	20,00	17,40										
40 t	18,00 m	t	37,89	29,57	24,11	20,26	17,40										

Inne konfiguracje

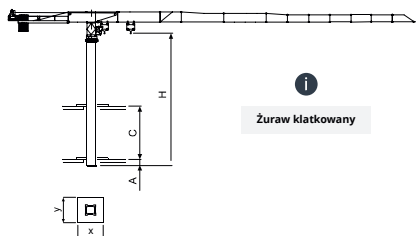

i  
Żuraw klatkowy

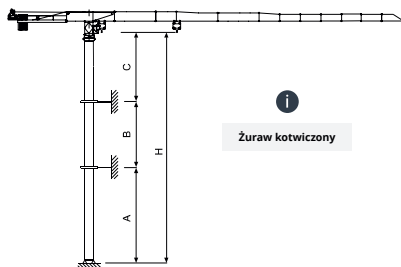


i  
Żuraw kotwiczny

Tower: HD23-26


C min	H max
14 m	48 m
16 m	54 m
18 m	60 m
21 m	66 m

Tower: HD23-26


	min	max
A	42 m	60 m
B	30 m	36 m
C	36 m	

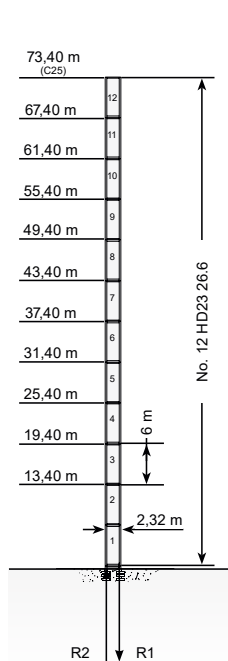


R1	-3743 kN	•	-5255	↕
R2	2510 kN	•	4316 kN	↕
	1540,65 kN			

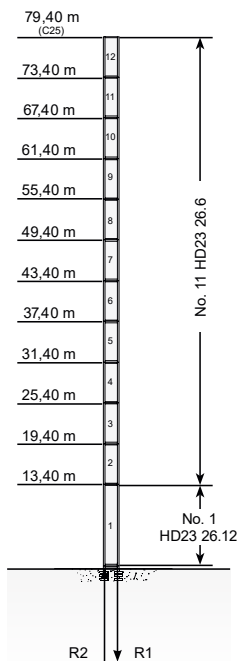

R1	-5450 kN	•	-6185	↕
R2	4217 kN	•	5200 kN	↕
	1627 kN			

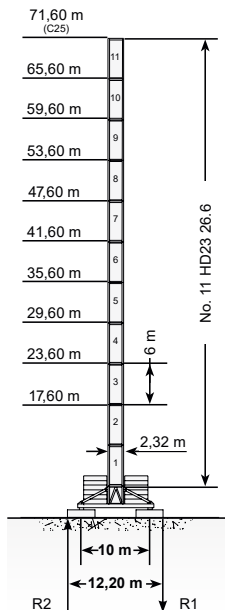

R1	-1598 kN	•	-1823	↕
R2	-344 kN	•	-120 kN	↕
	1735 kN			

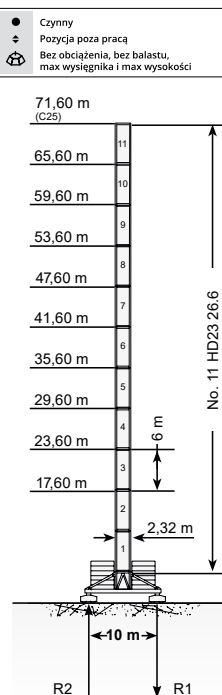




R1	-1684 kN	•	-1823	↕
R2	-406 kN	•	-190 kN	↕
	1735 kN			

- Czynnny
- ↕ Pozycja poza pracą
- Bez obciążenia, bez balastu, max wysięgnika i max wysokości







40  
tonTEREX  
CTT 721






Mechanizmy



CORLEONIS










				
	<b>94 AFC 200 D2</b>	163 kVA*	400 V - 50 Hz / 460 V - 60 Hz	2000/14/CE/ modyfikacja

\*średnie zużycie

			t	m/min		kW	
	94 AFC 200 D2 (Vector 2)		20	0 → 21	1°	94	
			7,5	0 → 52			
			6,4	0 → 58			
			2	0 → 146			
			40	0 → 11	1°		
			15	0 → 26			
			12,8	0 → 29	2°		
			4	0 → 73			

	DVF 5 15	0 → 88 m/min	15 kW
	SCC 2 2 132 P	0,67 r.p.m.	2 x 18 kW
	TSR 4RG 4M8	12 → 24 m/min (50 Hz) 14 → 28 m/min (60 Hz)	4 x 80 Nm
	TVF 4RT 4M9	0 → 21 m/min	4 x 9 kW
	<b>1</b>		

		T6
	TSR 4RG 4M8	53,60 m
	TVF 4RT 4M9	>53,60 m

	Wciągarka
	Mechanizm wodzaka
	Mechanizm obrotu
	Mechanizm jazdy torowej
	Dyrektywa na poziom hałasu
	Skonsultuj z nami
	Wymagania dotyczące zasilania
	Zasilanie
	Jazda po łuku