

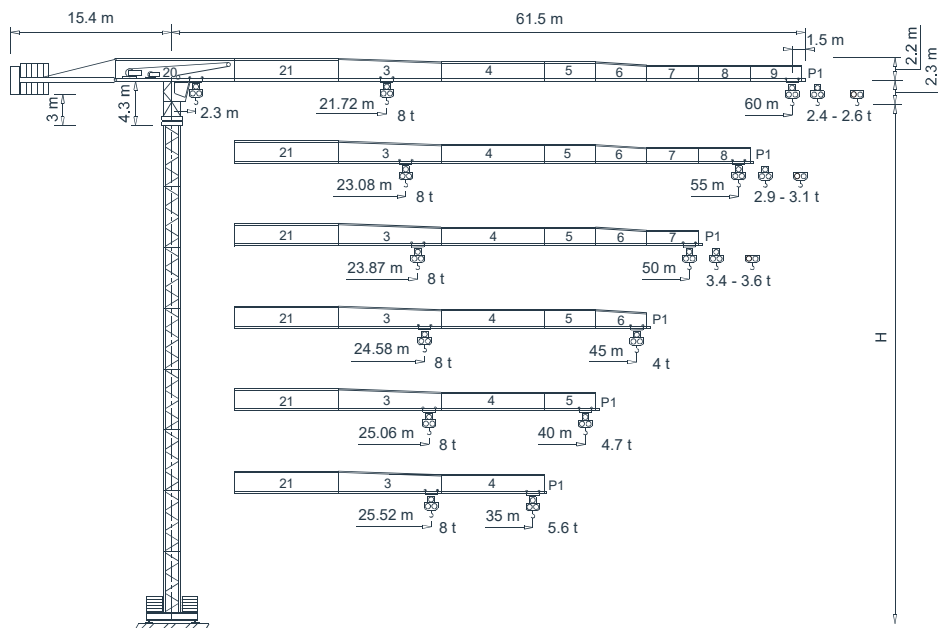


Tabela udźwignięć

		CTT 181-8											
		m	10	15	20	25	30	35	40	45	50	55	60
4 t	- 41.54 m	t	4	4	4	4	4	4	4	3,65	3,23	2,89	2,60
4 t	- 39.67 m	t	4	4	4	4	4	4	3,96	3,44	3,02	2,68	2,40
8 t	- 21.72 m	t	8	8	8,78	6,83	5,54	4,64	3,96	3,44	3,02	2,68	2,40
4 t	- 44.14 m	t	4	4	4	4	4	4	4	3,91	3,46	3,10	
4 t	- 42.21 m	t	4	4	4	4	4	4	4	3,71	3,26	2,90	
8 t	- 23.08 m	t	8	8	8	7,31	5,95	4,98	4,26	3,71	3,26	2,90	
4 t	- 45.62 m	t	4	4	4	4	4	4	4	4	3,60		
4 t	- 43.67 m	t	4	4	4	4	4	4	4	3,86	3,40		
8 t	- 23.87 m	t	8	8	8	7,59	6,18	5,18	4,44	3,86	3,40		
4 t	- 45 m	t	4	4	4	4	4	4	4	4			
8 t	- 24.58 m	t	8	8	8	7,85	6,39	5,36	4,59	4			
4 t	- 40 m	t	4	4	4	4	4	4	4				
8 t	- 25.06 m	t	8	8	8	8,02	6,54	5,48	4,70				
4 t	- 35 m	t	4	4	4	4	4	4					
8 t	- 25.52 m	t	8	8	8	8,19	6,67	5,60					




Zeskanuj kod
i pobierz kartę na telefon

8
ton

COMEDIL CTT 181

Inne konfiguracje

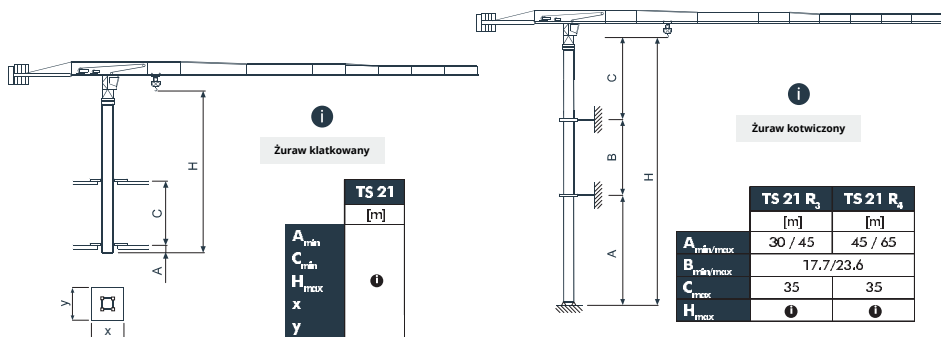

Mechanizmy

70 * kVA	400 V - 50 Hz / 460 V - 60 Hz	C € 87/405

- Wciągarka
- Mechanizm wozzaka
- Mechanizm obrotu
- Mechanizm jazdy torowej
- Dyrektywa na poziom hałasu
- Skonsultuj z nami
- Wymagania dotyczące zasilania
- Zasilanie
- Jazda po łuku

			m/min	↑	kW	
	30 AFC 40 (VARIANT)		0 ~ 3	4	30	278 m
			3 ~ 10	4		
			10 ~ 41	4		
			41 ~ 66	2.38		
			66 ~ 82	1.86		
			0 ~ 1.5	8		350 m (LEBUS)
			1.5 ~ 5	8		
			5 ~ 20.5	8		
			20.5 ~ 33	4.76		
			33 ~ 41	3.72		

	DVF 3 5 (VARIANT)	0 ~ 6 ~ 32 ~ 64 m/min	5 kW
	SSR 2 2 65	0.7 r.p.m. (50 Hz)	2 × 65 Nm
	▲ TAD 2RP 2M4	0 - 24 m/min	2 × 4 kW
	● TAD 2RG 4M3		4 × 3 kW
	!		

	▲	●
	Max. H [m]	
T ₃	39.1	> 39.1
T ₄	32.9	> 32.9

górnoobrotowe o wysięgniku poziomym

TS21

(■)

