


20
ton

TEREX
CTT 561A-20


Wersje montażowe

CORLEONIS

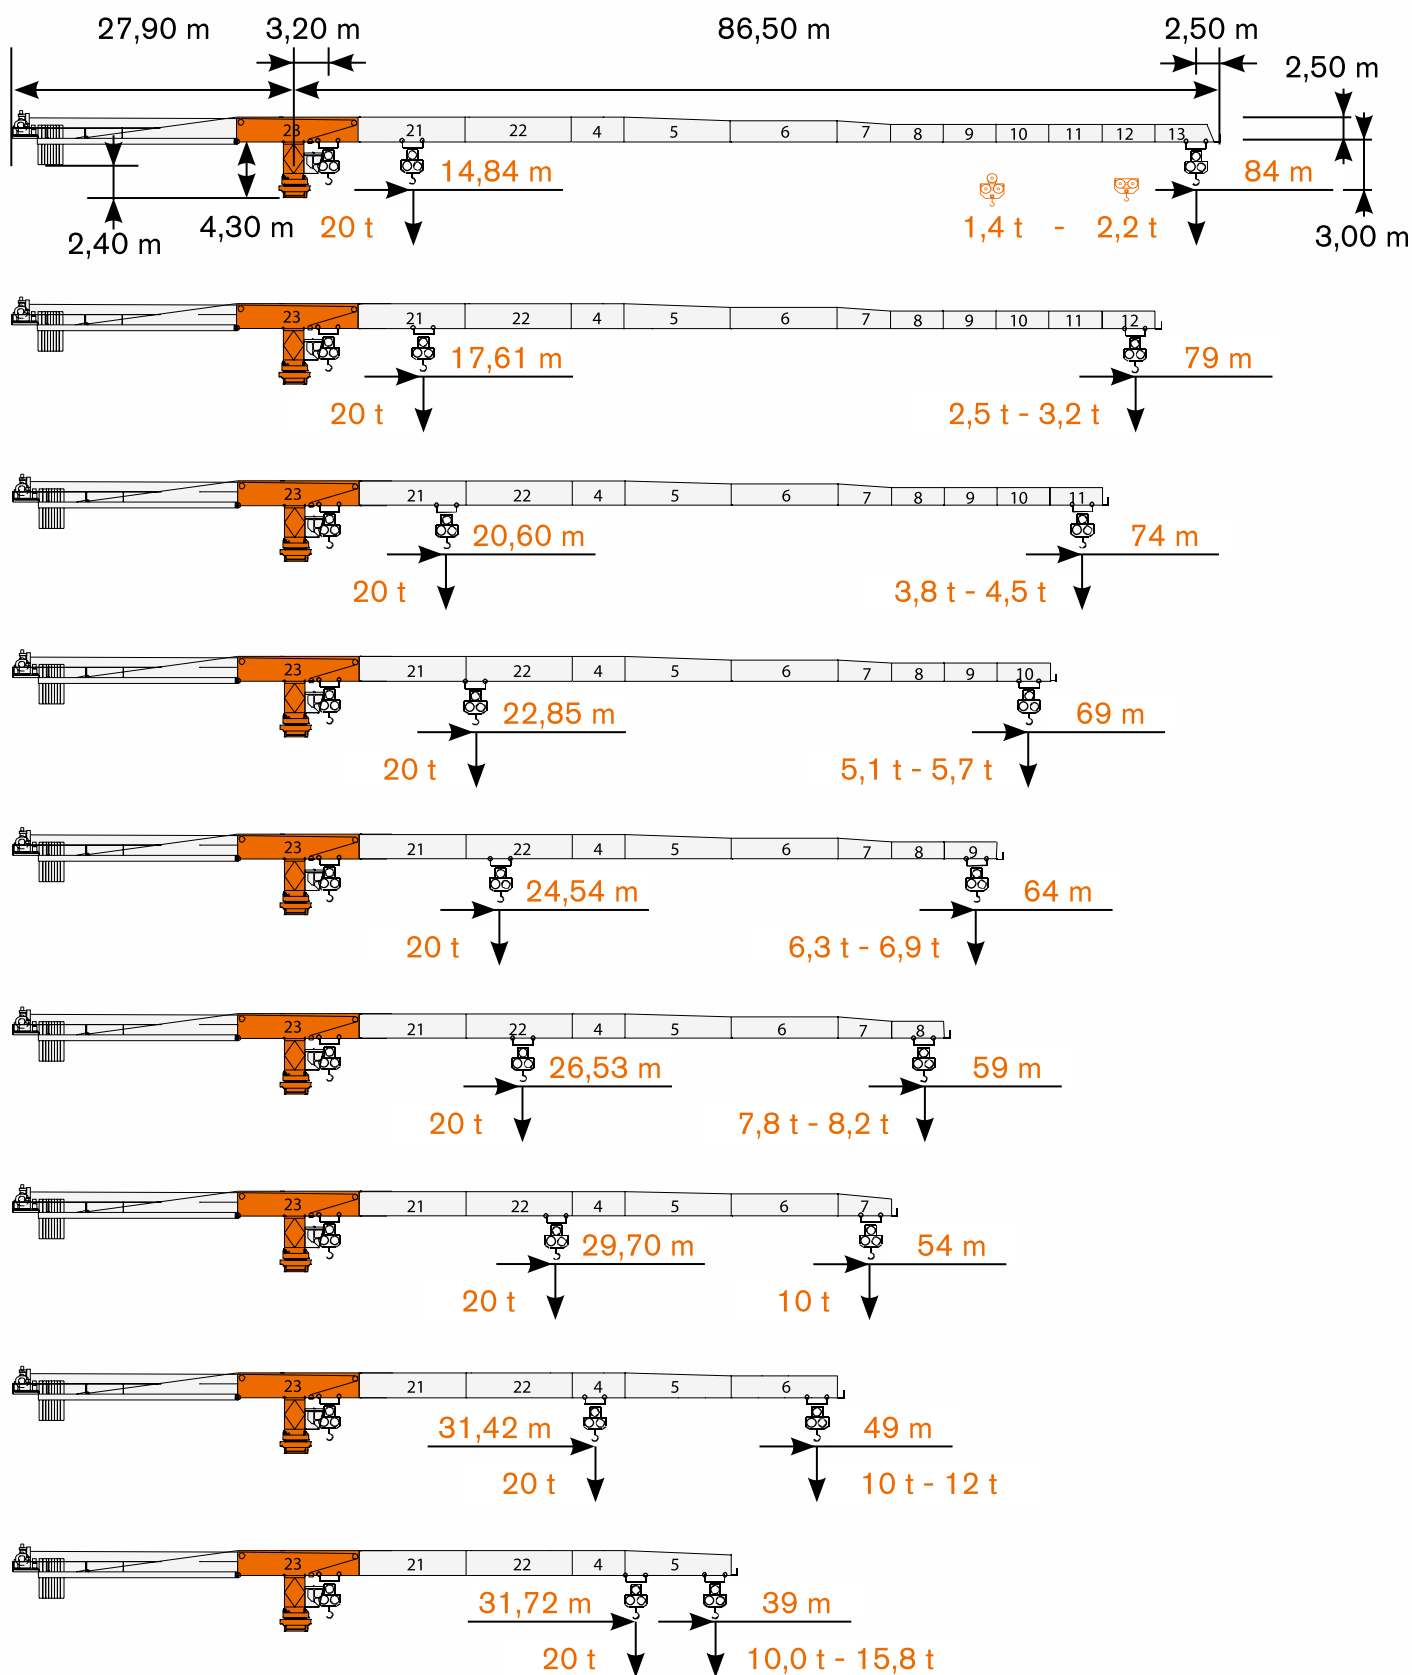


CTT 561A-20

				19 m	24 m	29 m	34 m	39 m	44 m	49 m	54 m	59 m	64 m	69 m	74 m	79 m	84 m
	10 t ➡	28,24 m	t	10,00	10,00	9,28	7,64	6,66	5,69	4,93	4,31	3,81	3,38	3,02	2,71	2,44	2,20
	10 t ➡	26,09 m	t	10,00	10,00	8,29	6,70	5,74	4,80	4,06	3,46	2,96	2,55	2,20	1,89	1,63	1,40
	20 t ➡	14,84 m	t	13,78	10,37	8,17	6,62	5,68	4,76	4,03	3,44	2,95	2,54	2,19	1,89	1,63	1,40
	10 t ➡	33,36 m	t	10,00	10,00	10,00	9,43	8,25	7,09	6,18	5,44	4,84	4,33	3,90	3,52	3,20	
	10 t ➡	31,19 m	t	10,00	10,00	10,00	8,60	7,44	6,31	5,42	4,70	4,10	3,60	3,18	2,82	2,50	
	20 t ➡	17,61 m	t	17,13	13,02	10,37	8,51	7,37	6,26	5,38	4,67	4,09	3,60	3,18	2,81	2,50	
	10 t ➡	39,14 m	t	10,00	10,00	10,00	10,00	10,00	8,68	7,61	6,75	6,04	5,44	4,94	4,50		
	10 t ➡	36,74 m	t	10,00	10,00	10,00	10,00	9,27	7,93	6,87	6,02	5,32	4,73	4,23	3,80		
	20 t ➡	20,60 m	t	20,00	15,86	12,72	10,52	9,19	7,87	6,84	6,00	5,30	4,72	4,23	3,80		
	10 t ➡	43,41 m	t	10,00	10,00	10,00	10,00	10,00	9,84	8,66	7,71	6,92	6,26	5,70			
	10 t ➡	41,13 m	t	10,00	10,00	10,00	10,00	10,00	9,19	8,03	7,08	6,31	5,65	5,10			
	20 t ➡	22,85 m	t	20,00	18,00	14,52	12,08	10,60	9,14	7,99	7,06	6,29	5,65	5,10			
	10 t ➡	46,93 m	t	10,00	10,00	10,00	10,00	10,00	10,00	9,50	8,47	7,62	6,90				
	10 t ➡	44,37 m	t	10,00	10,00	10,00	10,00	10,00	10,00	8,85	7,83	7,00	6,30				
	20 t ➡	24,54 m	t	20,00	20,00	15,83	13,21	11,62	10,05	8,82	7,82	6,99	6,30				
	10 t ➡	49,89 m	t	10,00	10,00	10,00	10,00	10,00	10,00	10,00	9,11	8,20					
	10 t ➡	48,18 m	t	10,00	10,00	10,00	10,00	10,00	10,00	9,80	8,70	7,80					
	20 t ➡	26,53 m	t	20,00	20,00	17,36	14,53	12,81	11,11	9,77	8,69	7,80					
	10 t ➡	54,00 m	t	10,00	10,00	10,00	10,00	10,00	10,00	10,00	10,00						
	10 t ➡	54,00 m	t	10,00	10,00	10,00	10,00	10,00	10,00	10,00	10,00						
	20 t ➡	29,70 m	t	20,00	20,00	20,00	16,58	14,64	12,73	11,22	10,00						
	10 t ➡	49,00 m	t	10,00	10,00	10,00	10,00	10,00	10,00								
	10 t ➡	49,00 m	t	10,00	10,00	10,00	10,00	10,00	10,00								
	20 t ➡	31,42 m	t	20,00	20,00	20,00	17,69	15,63	13,60	12,00							
	10 t ➡	39,00 m	t	10,00	10,00	10,00	10,00	10,00									
	10 t ➡	39,00 m	t	10,00	10,00	10,00	10,00	10,00									
	20 t ➡	31,72 m	t	20,00	20,00	20,00	17,88	15,80									

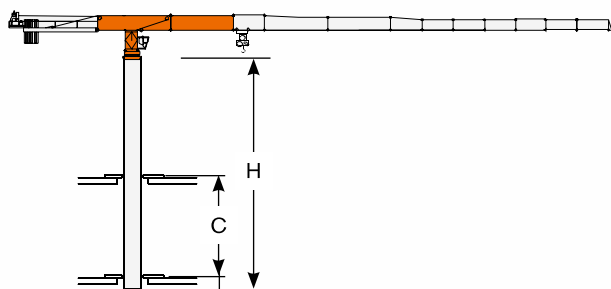

WIEŻA: HD23-22

C min	H max
12 m	36 m
14 m	42 m
16 m	48 m

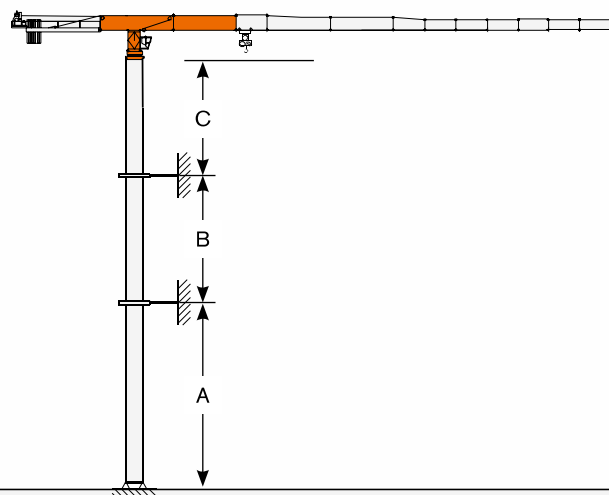


WIEŻA: HD23 & Basement: R1

	min	max
A	36 m	60 m
B	24 m	42 m
C	42 m	

WIEŻA: HD23 & Basement: R2


	min	max
A	36 m	72 m
B	24 m	42 m
C	42 m	

●	Czynny
◆	Pozycja poza pracą
	Bez obciążenia, bez balastu, max wysięgnika i max wysokości

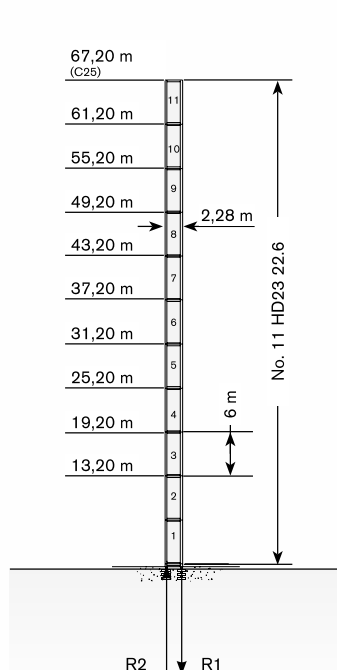


WIEŻA: HD23 & Basement: R1

	●	◆
R1	-3460 kN	-4123 kN
R2	2652 kN	3451 kN
	1150 kN	

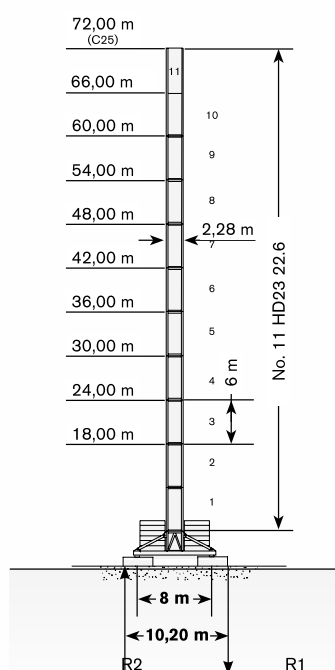


WIEŻA: HD23 & Basement: FP1

	●	◆
R1	-1620 kN	-1950 kN
R2	0 kN	0 kN
	1352 kN	

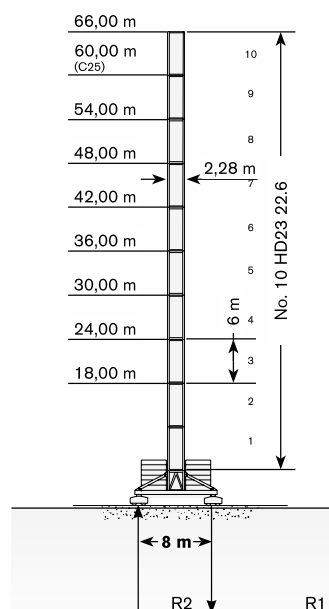


WIEŻA: HD23 & Basement: T1

	●	◆
R1	-1717 kN	-1585 kN
R2	0 kN	0 kN
	1300 kN	

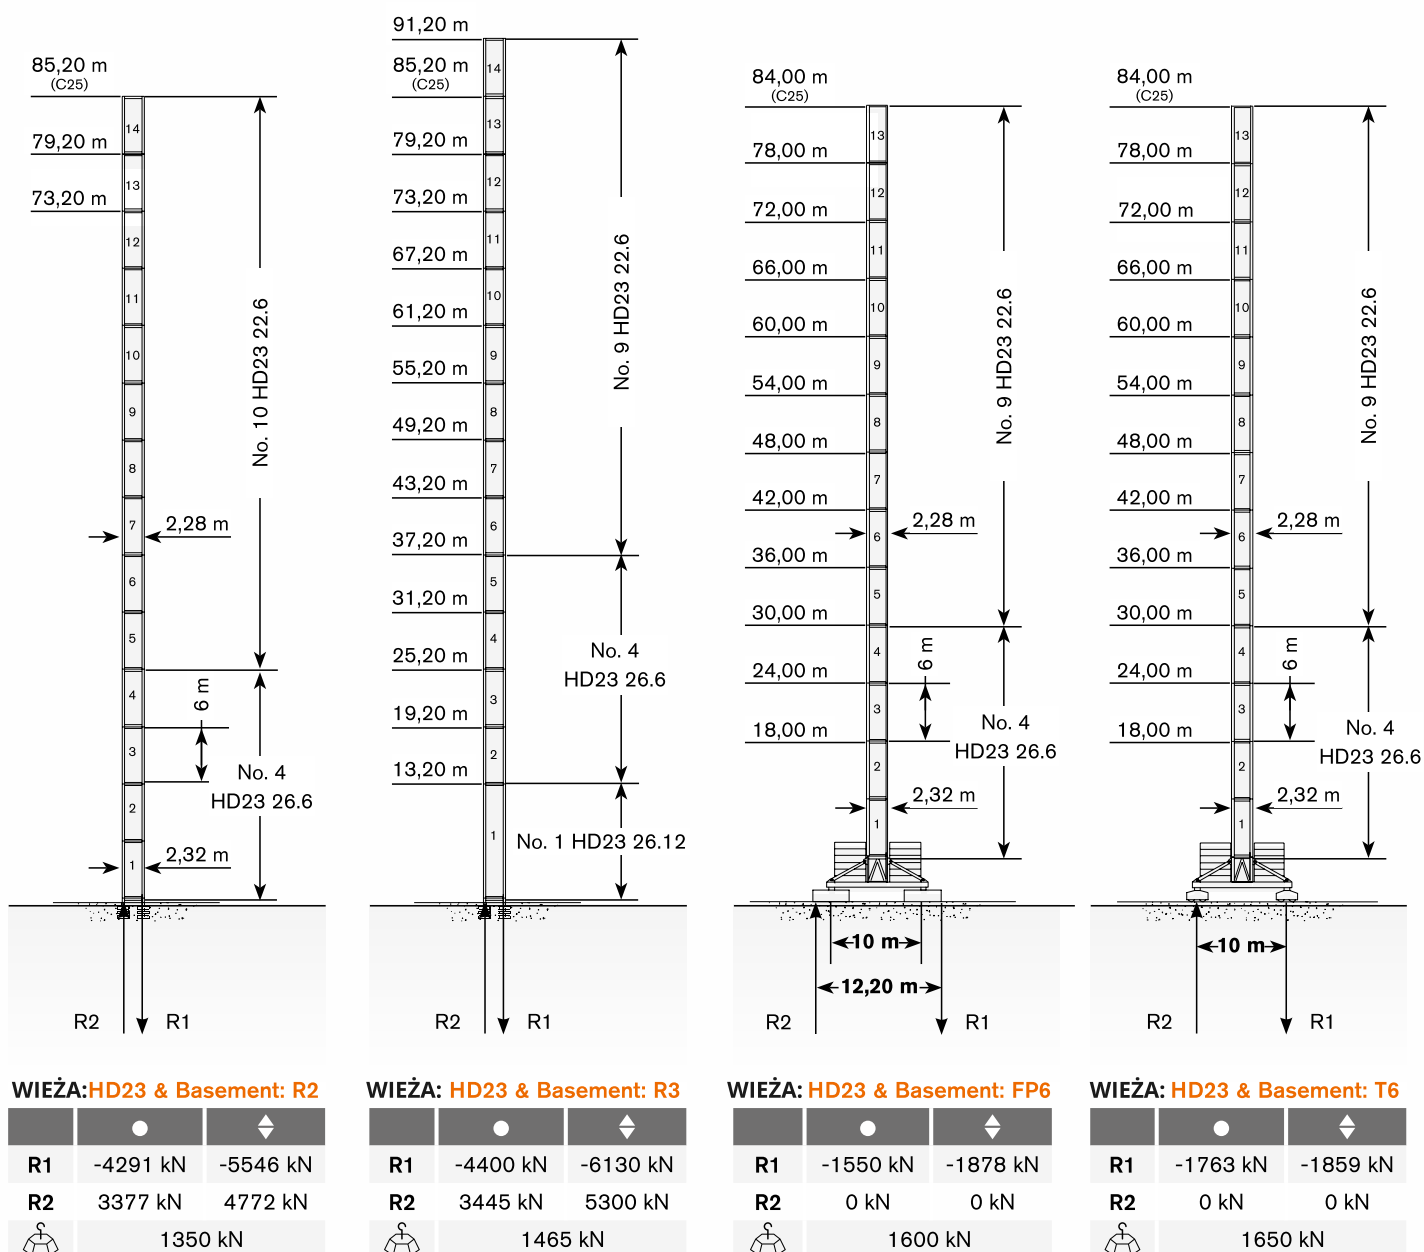

				
	67 AFC 100	113 kVA*	400V - 50Hz / 460V - 60Hz	2000/14/CE modificata

* średnie zużycie

			t	m/min	kW	
	67 AFC 100		10	0 → 34	67	
			8	0 → 41		
			6	0 → 54		
			4	0 → 77		
			2,4	0 → 118		
			20	0 → 17		
			16	0 → 21		
			12	0 → 27		
			8	0 → 39		
			4,8	0 → 59		

	DVF 5 15	0 → 100 m/min	11 kW
	SSR 4 4 80	0,73 r.p.m.	4 x 80 Nm
 	TSR 2RG 4M8	12 → 24 m/min (50 Hz) 14 → 28 m/min (60 Hz)	4 x 80 Nm
 	TSR 4RG 4M8	12 → 24 m/min (50 Hz) 14 → 28 m/min (60 Hz)	4 x 80 Nm
			

		T1	T6
 	TSR 2RG 4M8	48,00 m	48,00 m
 	TSR 4RG 4M8	> 48,00 m	> 48,00 m

	Wciągarka
	Mechanizm wodzaka
	Mechanizm obrotu
	Mechanizm jazdy torowej
	Dyrektywa na poziom hałasu
	Skonsultuj z nami
	Wymagania dotyczące zasilania
	Zasilanie
	Jazda po łuku