


8
ton

SANY
SFT 100

Wersje montażowe

CORLEONIS

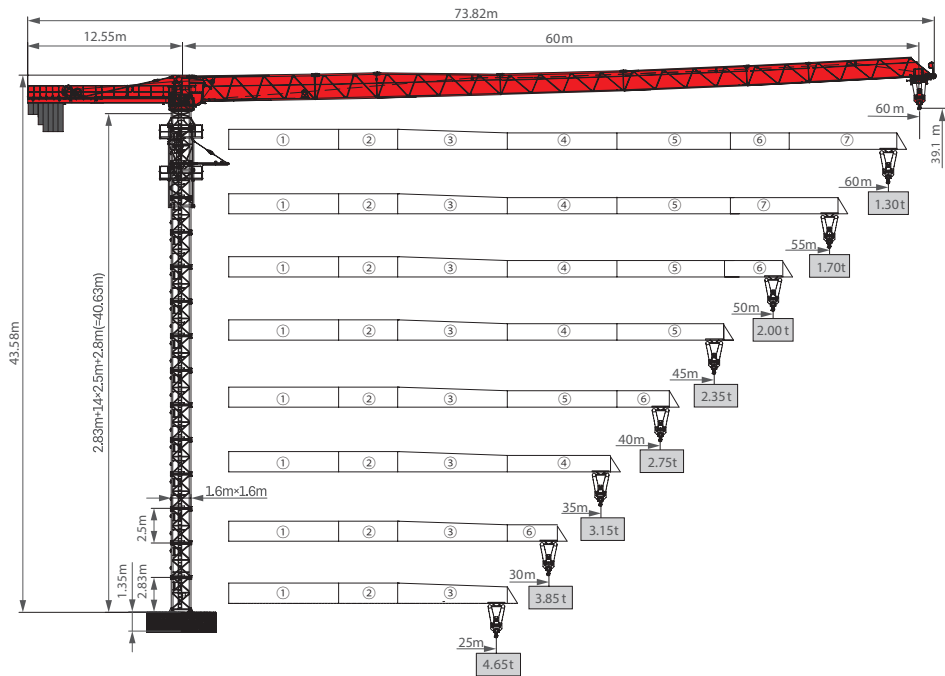

Zeskanuj kod
i pobierz kartę na telefon




SANY SFT 100



Tabela udźwigów

| Wysięgnik (m) | Udźwig maksymalny (t) | 15 | 18 | 20 | 22 | 25 | 28 | 30 | 32 | 35 | 38 | 40 | 42 | 45 | 48 | 50 | 52 | 55 | 58 | 60 |
|---------------|-----------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 60 | 2.5-32.44/3t | | | | 3.00 | | | | | 2.73 | 2.45 | 2.30 | 2.15 | 1.96 | 1.80 | 1.70 | 1.60 | 1.48 | 1.37 | 1.30 |
| | 2.5-18.05/6t | 6.00 | 5.32 | 4.75 | 4.07 | 3.55 | 3.26 | 3.00 | 2.68 | 2.41 | 2.25 | 2.10 | 1.91 | 1.75 | 1.65 | 1.56 | 1.43 | 1.32 | 1.25 | |
| 55 | 2.5-35.71/3t | | | | 3.00 | | | | | 2.77 | 2.60 | 2.44 | 2.23 | 2.05 | 1.94 | 1.84 | 1.70 | | | |
| | 2.5-19.83/6t | 6.00 | 5.94 | 5.31 | 4.57 | 3.99 | 3.67 | 3.39 | 3.03 | 2.73 | 2.55 | 2.39 | 2.18 | 2.00 | 1.89 | 1.79 | 1.65 | | | |
| 50 | 2.5-36.53/3t | | | | 3.00 | | | | | 2.86 | 2.68 | 2.51 | 2.30 | 2.11 | 2.00 | | | | | |
| | 2.5-20.28/6t | 6.00 | | 5.45 | 4.69 | 4.10 | 3.77 | 3.48 | 3.11 | 2.81 | 2.63 | 2.47 | 2.25 | 2.06 | 1.95 | | | | | |
| 45 | 2.5-37.13/3t | | | | 3.00 | | | | | 2.91 | 2.73 | 2.57 | 2.35 | | | | | | | |
| | 2.5-20.61/6t | 6.00 | | 5.56 | 4.78 | 4.18 | 3.84 | 3.55 | 3.18 | 2.87 | 2.68 | 2.52 | 2.30 | | | | | | | |
| 40 | 2.5-37.32/3t | | | | 3.00 | | | | | 2.98 | 2.75 | | | | | | | | | |
| | 2.5-20.71/6t | 6.00 | | 5.59 | 4.81 | 4.20 | 3.87 | 3.57 | 3.20 | 2.88 | 2.70 | | | | | | | | | |
| 35 | 2.5-35.00/3t | | | | 3.00 | | | | | | | | | | | | | | | |
| | 2.5-20.72/6t | 6.00 | | 5.60 | 4.81 | 4.21 | 3.87 | 3.58 | 3.15 | | | | | | | | | | | |
| 30 | 2.5-30.00/3t | | | | 3.00 | | | | | | | | | | | | | | | |
| | 2.5-20.64/6t | 6.00 | | 5.57 | 4.79 | 4.18 | 3.85 | | | | | | | | | | | | | |
| 25 | 2.5-25.00/3t | | | | 3.00 | | | | | | | | | | | | | | | |
| | 2.5-20.17/6t | 6.00 | | 5.42 | 4.65 | | | | | | | | | | | | | | | |

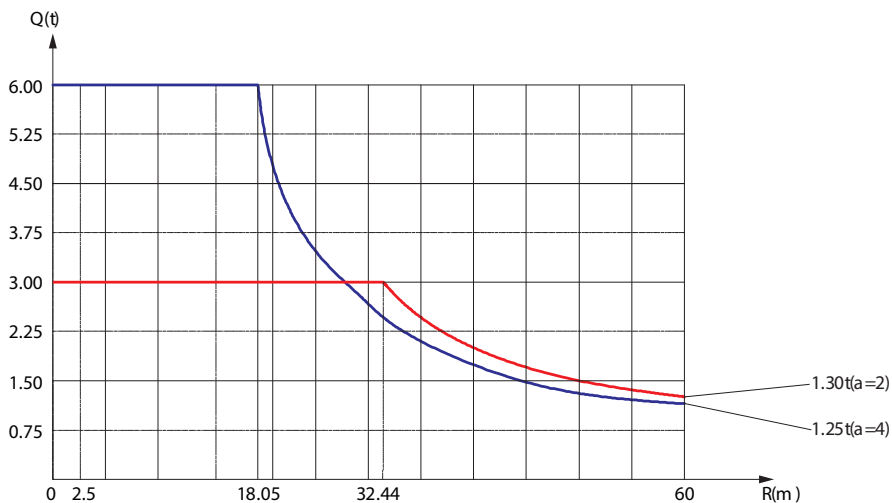



| | Legenda | Model | Moc | Prędkość |
|--------------------|---------|-----------------|---------------|------------|
| Obrót | | YPWEF132M2L-6F1 | 2x4.0kW | 0~0.6r/min |
| Wózek | | SXJ33.62P | 4.0kW | 0~60m/min |
| Wciągarka | | STQ24PK107 | 24kW | 0~88m/min |
| Jazda po torowisku | | STQ24PK107 | 5.2kW | 0~25m/min |
| Napięcie | | 380V(± 10%) | Częstotliwość | 50Hz |

Konfiguracje

